

Produktdatenblatt



Artikel: C6753 – FFP2 Maske

Beschreibung: Selbstfilternde FFP2-Schutz und Sicherheitsmaske.
Doppelter Schutz: Sowohl für den Träger der Maske als auch für die Personen in der Umgebung.

Hergestellt aus 5 Schichten, heißversiegeltes Finish, einschließlich Verstellbändern und anpassbarem Nasenbügel für einen festen Sitz und Kopfanpassung.

Einzelverpackt, mit Bedienungsanleitung in englisch und spanisch.

Material: 5 Schichten. Latexfrei
2 x Non-Woven, 2 x Meltblown, 1 x Baumwolle

Schutz: Mindest-Filtereffizienz $\geq 94\%$.

Zertifizierung: Klassifiziert als PSA (Persönliche Schutzausrüstung) gemäß der Europäischen Norm **EN 149:2001+A1:2009** und CE-Kennzeichnung #**2163**.



Product datasheet



Item: C6753 – FFP2 Mask

Description : Self-filtering, FFP2 protection and safety mask
Double protection: For the wearer of the mask and for the people around.


Manufactured with 5 layers, heat-sealed finish, including adjuster straps, adaptable nose clip for a tight fit and head adjuster.

Individual packaging, with instructions for use in english and spanish.

Material: 5 Layers. Latex-free
2 x Non-Woven, 2 x Meltblown, 1 x Cotton

Protection: Minimum filtering efficiency $\geq 94\%$.

Certification: Classified as **PPE** (Personal Protection Equipment) in accordance European Standard **EN 149:2001+A1:2009** by notified organism CE marking #2163

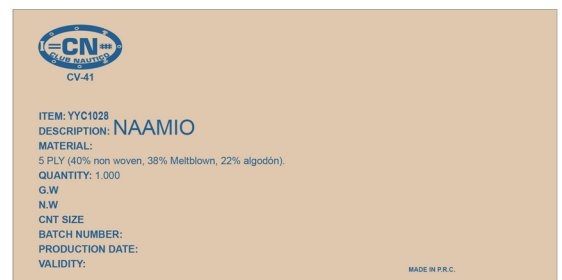

DOCUMENTATION

REF. CV-41 / YYC1028

MASK ULTRA PROTECTION FFP2

MASCARILLA ULTRA PROTECCIÓN FFP2

MASQUE FFP2 ULTRA PROTECTION FFP2

MASCHERINA PROTEZIONE ULTRA FFP2



MASTER BOX: 1000 pcs



CV-41

ITEM: YYC1028

DESCRIPTION: **NAAMIO**

MATERIAL:

5 PLY (40% non woven, 38% Meltblown, 22% algodón).

QUANTITY: 1.000

G.W

N.W

CNT SIZE

BATCH NUMBER:

PRODUCTION DATE:

VALIDITY:

MADE IN P.R.C.

BOX: 25 pcs

FFP2
Personal Protective Equipment (PPE)
Equipo de Protección Individual (EPI)

EN 149:2001+A1:2009
CE 2163 FFP2 NR
Filtration Efficiency ≥ 94%



CV-41 MASCARILLA ULTRA PROTECCIÓN FFP2
Comfortable protection against infection / Protección cómoda contra infecciones.

MASCARILLA ULTRA PROTECCIÓN FFP2
Personal Protective Equipment (PPE)
Equipo de Protección Individual (EPI)

Instructions:



Step for usage:

1. Open the foldable mask.
2. Make the nose bridge bar on the top side.
3. Put the strap onto the ear.
4. Adjust the soft bar on the fit the nose.
5. Make sure you can breathe well and readjust if necessary.

INSTRUCCIONES DE USO:

1. Abre la máscara plegable.
2. Ajusta la máscara en la parte superior de la nariz.
3. Ajusta las cintas elásticas por detrás de las orejas.
4. Anódate la pieza nasal a la parte superior de la nariz.
5. Asegúrate de poder respirar bien y ajústala si es necesario.

WARNING:

1. This mask marked "NR" is for single use only.
2. This mask helps protect against certain particulate contaminants but does not completely eliminate exposure to the risk of contracting disease or infection.
3. Change the mask immediately if breathing becomes difficult or the mask becomes damaged or distorted.

ATENCIÓN:

1. Esta máscara "NR" es recomendada para un solo uso.
2. Esta máscara ayuda a proteger contra ciertas partículas contaminantes, pero no elimina por completo la exposición al riesgo de contraer enfermedades o infecciones.
3. Cambie la máscara inmediatamente si la respiración se vuelve difícil o la máscara se daña o se distorsiona.

FFP2
Personal Protective Equipment (PPE)
Equipo de Protección Individual (EPI)

EN 149:2001+A1:2009
CE 2163 FFP2 NR
Filtration Efficiency ≥ 94%



CV-41 MASCARILLA ULTRA PROTECCIÓN FFP2
Comfortable protection against infection / Protección cómoda contra infecciones.

FFP2
Personal Protective Equipment (PPE)
Equipo de Protección Individual (EPI)

EN 149:2001+A1:2009
CE 2163 FFP2 NR
Filtration Efficiency ≥ 94%

Organismo notificado: CE 2163
UNIVERSITAT DE CARLDES III FP DE CALIDAD (Spain)
EN 149:2001 + A1:2009

Organismo notificado: CE 2163
UNIVERSITAT DE CARLDES III FP DE CALIDAD (Spain)
EN 149:2001 + A1:2009

Referencia del producto: YYC1028
Material: 40% Non-woven, 38% Meltblown, 22% algodón
Cantidad por caja: 25 piezas

Fecha de producción:
Lote:
Plazo de validez:

Condiciones de almacenamiento:
Temperatura de -20°C a 40°C; humedad relativa menor del 80%.

Se debe garantizar que las cajas estén cerradas, no estén dañadas, no estén contaminadas, no se vean afectadas por la humedad, preste atención a la prevención de incendios, evite que las cajas se mojen y la exposición de las mismas al sol.

Storage conditions:
Temperature 20°C to 40°C; relative humidity less than 80%.

Products in storage and transitation should be guaranteed to be sealed, not damaged, not contaminated, not affected with damp, pay attention to fire prevention, rain-proof, avoid proof, avoid hard light.

Importado por / Imported by:
B30668420, C/ Sofia, 3-5
Pol. Ind. Cabezo Beaza 30353 Cartagena (Spain)

Medio in P.R.C.
FABRICANTE MANUFACTURER:
Anhui Yuhua Textile Co., Ltd.
Address: No. 18, Jing Road,
Jingde, Wangjiang, Guangdong, China
MADE IN P.R.C.

产品型号: FFP2 NR (EPI)
制造商: 安徽宇华纺织有限公司
生产地址: 江德镇王江村
生产时间: 2020年11月15日

Comprobación certificados/
Certificate verification:
www.certificados.cfira.es

Comprobación certificados/
Certificate verification:
www.certificados.cfira.es

BAG: 1 pc

Regulation/ Regulation: 2016/425

FFP2

Equipo de Protección Individual (EPI)
Personal Protective Equipment (PPE)

Model: YYC1028

CE 2163
EN 149:2001+A1:2009
FFP2 NR
Filtration Efficiency ≥ 94%

Importado por / Imported by:
B30668420, C/ Sofia, 3-5
Pol. Ind. Cabezo Beaza 30353 Cartagena (Spain)

Organismo notificado / Notified body:
UNIVERSITAT DE CARLDES III FP DE CALIDAD (Spain)
EN 149:2001 + A1:2009

FABRICANTE MANUFACTURER:
Anhui Yuhua Textile Co., Ltd.
Address: No. 18, Jing Road,
Jingde, Wangjiang, Guangdong, China
MADE IN P.R.C.

Cantidad por caja 25 Piezas
Quantity per box 25 Pieces

Comprobación certificados/
Certificate verification:
www.certificados.cfira.es



INSTRUCCIONES DE USO:

1. Abre la máscara plegable.
2. Ajusta la máscara en la parte superior de la nariz.
3. Ajusta las cintas elásticas por detrás de las orejas.
4. Anódate la pieza nasal a la parte superior de la nariz.
5. Asegúrate de poder respirar bien y ajústala si es necesario.

PRECAUCIÓN:

1. Esta máscara "NR" es recomendada para un solo uso.
2. Esta máscara ayuda a proteger contra ciertas partículas contaminantes, pero no elimina por completo la exposición al riesgo de contraer enfermedades o infecciones.
3. Cambie la máscara inmediatamente si la respiración se vuelve difícil o la máscara se daña o se distorsiona.

Material: 50% Non-woven, 33.33% Meltblown, 16.67% algodón

Fecha de producción / Production date: 2020/11/15
Lote / Production Batch: 20201115
Plazo de validez / Expiration date: 2023/11/14

5 Capas de protección / 5 Layer protection
Excelente transpirabilidad / Excellent Breathability

Mantener a temperatura de -20°C a +40°C / Temperature: -20°C to 40°C
Mantener a Max. humedad relativa < 80% / Relative humidity less than 80%

5 Capas de protección / 5 Layer protection
Excelente transpirabilidad / Excellent Breathability

Comprobación certificados para los colores / Certificate verification: Comfortable ear straps

Prevenir PAZ 2 / Prevent PAZ 2

Colaboramos con



Asociaciones y Entidades a las que pertenecemos



Manufacturer:
JIANGMEN YANYANG TRADING CO.,LTD

NO.1,4TH FLOOR,BUILDING 2,NO.18 XINYI ROAD,JIANGHAI DISTRICT,JIANGMEN
CITY,GUANGDONG PROVINCE, CHINA

EU Declaration of Conformity

We, the manufacturer, herewith declare that the products

Filtering half mask

Brand: CRDLIGHT Item No.: YYC1028

Meet the essential requirements and relevant provisions of EU Directive:

Personal Protective Equipment Regulation(EU) 2016/425 Annex 5

This Declaration of conformity is valid in connection with the following test report:

Certificate No:2163-PPE-1732

Report Date: November 23, 2020

Test Reported by: Jiangsu Guojian Testing Technology Co.,Ltd

Application Standard: EN149:2001+A1:2009 FFP2 NR

Classifications: FFP2 NR

The above mentioned declaration of conformity is exclusively under the responsibility of

JIANGMEN YANYANG TRADING CO.,LTD
NO.1,4TH FLOOR,BUILDING 2,NO.18 XINYI ROAD,JIANGHAI DISTRICT,JIANGMEN
CITY,GUANGDONG PROVINCE, CHINA



Jiangmen China 2020-December-04

Place,

Date



EU TYPE EXAMINATION CERTIFICATE

Certificate No: 2163-PPE-1732

Respiratory protective devices, filtering half masks to protect against particles manufactured by

JIANGMEN YANYANG TRADING CO., LTD

No. 1, 4th Floor, Building 2, No.18 Xinyi Road, Jianghai District, Jiangmen City,
Guangdong Province, China

are tested and evaluated according to

**EN 149:2001 + A1:2009 Respiratory Protective Devices -
Filtering Half Masks to Protect Against Particles -
Requirements, Testing, Marking**

Based on the type examination conducted with the evaluation of test reports, technical file according to Personal Protective Equipment Regulation (EU) 2016/425 Annex 5, it is approved that the product meets the requirements of the regulation.

Product Definition


Single shift use particle filtering half mask for protection against solid and liquid aerosols, is a folding type, 5 layers cotton and polypropylene fabrics, without valve, fitted with ear loops, with internal nose clip and inside sponge strip.

Brand Name: CRDLIGHT **Model:** YYC1028 **Classification:** FFP2 NR
Model have white, black, grey, pink, and blue versions

Here by the manufacturer is allowed to use notified body number (2163) and can fix CE mark, as shown below, on the Category III product models given above, with;

- Issuing an appropriate EU Declaration of Conformity according to **Personal Protective Equipment Regulation (EU) 2016/425 Annex 9**.
- Ongoing successful performance in fulfilment of the requirements set out in **Personal Protective Equipment Regulation (EU) 2016/425** and harmonised standards, ensured by assessments based on **Annex 7 (Module C2) or Annex 8 (Module D)** of the regulation no later than 1 year from the beginning of serial production

This certificate is initially issued on **04/12/2020** and will be valid for 5 years, if there is no change in the relevant harmonised standard affecting the essential health and safety requirements.



Suat KACMAZ
UNIVERSAL CERTIFICATION
Director



TECHNICAL ASSESSMENT REPORT

REPORT DATE / NO: 04.12.2020 / 2163-KKD-1732

Manufacturer: JIANGMEN YANYANG TRADING CO., LTD

Address: No. 1, 4th Floor, Building 2, No.18 Xinyi Road, Jianghai District, Jiangmen City, Guangdong Province, China

This report is for the, given above, manufacturer, prepared according to the test results obtained from Jiangsu Guojian Testing Technology Co. Ltd. accredited by CNAS (Chinese Accreditation Body), signatory to ILAC MRA, with number CNAS L10118 for the product identified below, dated 23.11.2020 with Serial Id 2020-WSZ FHL No.8631 based on EN 149: 2001 + A1: 2009 standard and test reports on the material safety by means of toxic, carcinogen, irritating and sensitivity evaluation.

The technical file of the manufacturer, and risk evaluation against the essential health safety requirements and the test report evaluated for their relation with Essential Requirements of Personal Protective Equipment Regulation and found to be appropriate.

This report is an annex and an integral part of the EU Type Examination Certificate issued to the manufacturer. The test results and issued certificate belongs only to the tested model. The technical report consists of a total of 6 pages.

Product Description: Single shift use particle filtering half mask for protection against solid and liquid aerosols, is a folding type, 5 layers cotton and polypropylene fabrics, without valve, fitted with ear loops, with inside nose bridge.

Component and Materials:

Component	Material	Grade / Size
1st layer (Outer)	Non-Woven Fabric	50 g/m ² (±5 g/m ²)
2nd layer	Melt-blown - non-woven fabric	25 g/m ² (±5 g/m ²)
3rd layer	Melt-blown - non-woven fabric	25 g/m ² (±5 g/m ²)
4th layer	Hot Air cotton	25 g/m ² (±5 g/m ²)
5th layer (Inner)	Non-Woven Fabric	25 g/m ² (±5 g/m ²)
Internal Nose Clip	Polypropylene	52 mm (±5 mm)
Ear Loop	Polyester + Cotton	23 cm (±1 cm)
Sponge Strip	Polyurethane	120 mm (±1 mm)
Plastic Clip	Polypropylene	50 mm (±1 cm)

Classification: FFP2 NR

Brand Name: CRDLIGHT **Model:** YYC1028

Colored samples of the mask



White



Black



Blue



Grey



Pink



**THE CLAUSES OF EN 149: 2001 + A1: 2009 STANDARD RELATED TO EUROPEAN UNION DIRECTIVE
EU 2016/425 REQUIREMENTS**

1.1. Design principles

1.1.1. Ergonomics

PPE must be so designed and manufactured that in the foreseeable conditions of use for which it is intended the user can perform the risk related activity normally whilst enjoying appropriate protection of the highest possible level.

1.1.2. Levels and classes of protection

1.1.2.1. Highest level of protection possible

The optimum level of protection to be taken into account in the design is that beyond which the constraints by the wearing of the PPE would prevent its effective use during the period of exposure to the risk or normal performance of the activity.

1.1.2.2. Classes of protection appropriate to different levels of risk

Where differing foreseeable conditions of use are such that several levels of the same risk can be distinguished, appropriate classes of protection must be taken into account in the design of the PPE.

1.2. Innocuousness of PPE

1.2.1. Absence of risks and other inherent nuisance factors

PPE must be so designed and manufactured as to preclude risks and other nuisance factors under foreseeable conditions of use.

1.2.1.1. Suitable constituent materials

The materials of which the PPE is made, including any of their possible decomposition products, must not adversely affect the health or safety of users.

1.2.1.2. Satisfactory surface condition of all PPE parts in contact with the user

Any part of the PPE that is in contact or is liable to come into contact with the user when the PPE is worn must be free of rough surfaces, sharp edges, sharp points and the like which could cause excessive irritation or injuries

1.2.1.3. Maximum permissible user impediment

Any impediment caused by PPE to movements to be made, postures to be adopted and sensory perception must be minimized; nor must PPE cause movements which endanger the user or other persons.

1.3 Comfort and effectiveness

1.3.1. Adaptation of PPE to user morphology

PPE must be designed and manufactured in such a way as to facilitate its correct positioning on the user and to remain in place for the foreseeable period of use, bearing in mind ambient factors, the actions to be carried out and the postures to be adopted. For this purpose, it must be possible to adapt the PPE to fit the morphology of the user by all appropriate means, such as adequate adjustment and attachment systems or the provision of an adequate range of sizes.

1.3.2. Lightness and design strength

PPE must be as light as possible without prejudicing design strength and efficiency.

Apart from the specific additional requirements which they must satisfy in order to provide adequate protection against the risks in question (see 3), PPE must be capable of withstanding the effects of ambient phenomena inherent under the foreseeable conditions of use

1.4. Information supplied by the manufacturer

The notes that must be drawn up by the former and supplied when PPE is placed on the market must contain all relevant information on:

- a) In addition to the name and address of the manufacturer and/or his authorized representative established in the Community
- b) Storage, use, cleaning, maintenance, servicing and disinfection. cleaning, maintenance or disinfectant protection recommended by manufacturers must have no adverse effect on PPE or users when applied in accordance with the relevant instructions;
- c) Performance as recorded during technical tests to check the levels or classes of protection provided by the PPE in question;
- d) Suitable PPE accessories and the characteristics of appropriate spare parts;
- e) The classes of protection appropriate to different levels of risk and the corresponding limits of use;
- f) The obsolescence deadline or period of obsolescence of PPE or certain of its components;
- g) The type of packaging suitable for transport;
- h) The significance of any markings (see 2.12)
- i) Where appropriate the references of the Directives applied in accordance with Article 5(6) (b);
- j) The name, address and identification number of the notified body involved in the design stage of the PPE

These notes, which must be precise and comprehensible, must be provided at least in the official language(s) of the member state of destination



2. ADDITIONAL REQUIREMENTS COMMON TO SEVERAL CLASSES OR TYPES OF PPE

2.1. PPE incorporating adjustment systems

If PPE incorporates adjustment systems, the latter must be designed and manufactured so that, after adjustment, they do not become undone unintentionally in the foreseeable conditions of use.

2.3. PPE for the face, eyes and respiratory system

Any restriction of the user's face, eyes, field of vision or respiratory system by the PPE shall be minimised.

The screens for those types of PPE must have a degree of optical neutrality that is compatible with the degree of precision and the duration of the activities of the user.

If necessary, such PPE must be treated or provided with means to prevent misting-up.

Models of PPE intended for users requiring sight correction must be compatible with the wearing of spectacles or contact lenses.

2.4. PPE subject to ageing

If it is known that the design performance of new PPE may be significantly affected by ageing, the month and year of manufacture and/or, if possible, the month and year of obsolescence must be indelibly and unambiguously marked on each item of PPE placed on the market and on its packaging.

If the manufacturer is unable to give an undertaking with regard to the useful life of the PPE, his instructions must provide all the information necessary to enable the purchaser or user to establish a reasonable obsolescence month and year, taking into account the quality level of the model and the effective conditions of storage, use, cleaning, servicing and maintenance.

Where appreciable and rapid deterioration in PPE performance is likely to be caused by ageing resulting from the periodic use of a cleaning process recommended by the manufacturer, the latter must, if possible, affix a marking to each item of PPE placed on the market indicating the maximum number of cleaning operations that may be carried out before the equipment needs to be inspected or discarded. Where such a marking is not affixed, the manufacturer must give that information in his instructions.

2.6. PPE for use in potentially explosive atmospheres

PPE intended for use in potentially explosive atmospheres must be designed and manufactured in such a way that it cannot be the source of an electric, electrostatic or impact-induced arc or spark likely to cause an explosive mixture to ignite.

2.8. PPE for intervention in very dangerous situations

The instructions supplied by the manufacturer with PPE for intervention in very dangerous situations must include, in particular, data intended for competent, trained persons who are qualified to interpret them and ensure their application by the user.

The instructions must also describe the procedure to be adopted in order to verify that PPE is correctly adjusted and functional when worn by the user.

Where PPE incorporates an alarm which is activated in the absence of the level of protection normally provided, the alarm must be designed and placed so that it can be perceived by the user in the foreseeable conditions of use.

2.9. PPE incorporating components which can be adjusted or removed by the user

Where PPE incorporates components which can be attached, adjusted or removed by the user for replacement purposes, such components must be designed and manufactured so that they can be easily attached, adjusted and removed without tools.

2.12. PPE bearing one or more identification or recognition marks directly or indirectly relating to health and safety

The identification or recognition marks directly or indirectly relating to health and safety affixed to these types or classes of must preferably take the form of harmonized pictograms or ideograms and must remain perfectly legible throughout the foreseeable useful life of the PPE. In addition, these marks must be complete, precise and comprehensible so as to prevent any misinterpretation; in particular, where such marks incorporate words or sentences, the latter must appear in the official language(s) of the Member State where the equipment is to be used.

If PPE (or a PPE component) is too small to allow all or part of the necessary marking to be affixed, the relevant information must be mentioned on the packing and in the manufacturer's notes.

3. ADDITIONAL REQUIREMENTS SPECIFIC TO PARTICULAR RISKS

3.10.2. Protection against cutaneous and ocular contact

PPE intended to prevent the surface contact of all or part of the body with substances and mixtures which are hazardous to health or with harmful biological agents must be capable of preventing the penetration or permeation of such substances and mixtures and agents through the protective integument under the foreseeable conditions of use for which the PPE is intended.

To this end, the constituent materials and other components of those types of PPE must be chosen or designed and incorporated so as to ensure, as far as possible, complete leak-tightness, which will allow where necessary prolonged daily use or, failing this, limited leak-tightness necessitating a restriction of the period of wear.

Where, by virtue of their nature and the foreseeable conditions of their use, certain substances and mixtures which are hazardous to health or harmful biological agents possess high penetrative power which limits the duration of the protection provided by the PPE in question, the latter must be subjected to standard tests with a view to their classification on the basis of their performance. PPE which is considered to be in conformity with the test specifications must bear a marking indicating, in particular, the names or, in the absence of the names, the codes of the substances used in the tests and the corresponding standard period of protection. The manufacturer's instructions must also contain, in particular, an explanation of the codes (if necessary), a detailed description of the standard tests and all appropriate information for the determination of the maximum permissible period of wear under the different foreseeable conditions of use.

Technical Assessment of EN 149: 2001 + A1: 2009 Standard and other Standards it refers to, Clauses Corresponding to the
(EU) 2016/425 Directive

Conforming to EN 149:2001+ A1:2009 Standard Requirements																								
Article 5	<p>Classification: Particle Filtering Half Mask</p> <p>The mask subject to evaluation based on the test results and technical file provided by the manufacturer is classified as; Filtering Efficiency and Maximum Total Inward Leakage: Classified as FFP2</p> <p>Mask is classified for single shift use, NR</p>																							
Article 7.4	<p>Packing: Particle filtering half masks are packaged to protect them from contamination before use and with cardboard boxes to prevent mechanical damage. The packaging design and the product is considered to withstand the foreseeable conditions of use based on the visual inspection results given in the test report. Details given in Annex 5 of Technical File</p>																							
Article 7.5	<p>Material: Materials used in particle filtering half masks, according to the simulated wearing treatment and temperature conditioning results; It is understood it withstands handling and wear over the period for which the particle filtering half mask is designed to be used, it suffered mechanical failure of the facepiece or straps, any material from the filter media released by the air flow through the filter has not constitute a hazard or nuisance for the wearer. The manufacturer declares that the materials used in manufacturing of the mask does not have an adverse affect to the health and safety of users. Manufacturer declares that the material do not have any adverse effect for the wearers health in Section 7 of the Technical File.</p> <p>Based on the test results, the masks did not collapse when subject to simulated wearing and temarature conditioning. No nuisance situation is reported during the practical performance tests by human subjects.</p> <p>The model have colored ones manufactured by use of colored spunbound fabrics in the most outer layer of the mask, with the earloops as well. Based on the test results in the test reports, Report numbers DC20110369 (Black), DC20110368 (Blue), DC20110370 (Grey), DC20110367 (Pink) prepared by STC (Dongguan) Company Limited and Report number TST202011Q2588-6EN (white) prepared by TST Testing Technology Co., Ltd., SDS (Safety Data Sheet) reports. Based on the results the colored materials (spunbound fabric) used in the most outer layer of the mask is considered to be safe for use on the mask. Annexed sample photos of the colored masks.</p>																							
Article 7.6	<p>Cleaning and Disinfection: Particle filtering half mask is not designed to be as re-usable. No cleaning or disinfection procedure provided by the manufacturer.</p>																							
Article 7.7	<p>Practical Performance :</p> <p>The test report indicates that the human subjects did not face any difficulty in performing the excercises while they were weared by the sample masks, in walking test or work simulation tests. The wearers did not report any failure by means of head harness / straps/ earloops comfort, security of fastenings and field of vision. Also no imperfections reported during total inward tests about the comfort, field of vision and fastening issues.</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Assessed Elements</th> <th>Positive</th> <th>Negative</th> <th>Requirements in accordance with EN 149:2001 + A1:2009 and Result</th> </tr> </thead> <tbody> <tr> <td>1.The face piece fitting</td> <td>2</td> <td>0</td> <td rowspan="6">Positive results are obtained from the performance tests related to the implementation under real conditions, applied with the compatibility with skin evaluation (7.10). No imperfections</td> </tr> <tr> <td>2.Head harness comfort</td> <td>2</td> <td>0</td> </tr> <tr> <td>3.Security of fastenings</td> <td>2</td> <td>0</td> </tr> <tr> <td>4.Speech clearness</td> <td>2</td> <td>0</td> </tr> <tr> <td>5.Field of vision</td> <td>2</td> <td>0</td> </tr> <tr> <td>6.Materials compatibility with skin</td> <td>10</td> <td>0</td> </tr> </tbody> </table> <p>Conditioning : (A.R.) As Received, original</p>	Assessed Elements	Positive	Negative	Requirements in accordance with EN 149:2001 + A1:2009 and Result	1.The face piece fitting	2	0	Positive results are obtained from the performance tests related to the implementation under real conditions, applied with the compatibility with skin evaluation (7.10). No imperfections	2.Head harness comfort	2	0	3.Security of fastenings	2	0	4.Speech clearness	2	0	5.Field of vision	2	0	6.Materials compatibility with skin	10	0
Assessed Elements	Positive	Negative	Requirements in accordance with EN 149:2001 + A1:2009 and Result																					
1.The face piece fitting	2	0	Positive results are obtained from the performance tests related to the implementation under real conditions, applied with the compatibility with skin evaluation (7.10). No imperfections																					
2.Head harness comfort	2	0																						
3.Security of fastenings	2	0																						
4.Speech clearness	2	0																						
5.Field of vision	2	0																						
6.Materials compatibility with skin	10	0																						
Article 7.8	<p>Finish of Parts: Particle filtering half masks, which are likely to come into contact with the user, do not have sharp edges and do not contain burrs.</p>																							
Article 7.9.1	<p>Total Inward Leakage:</p> <p>The Total Inward Leakage test is conducted by 10 individual in an aerosol chamber with a walking band, and samples are taken during the conduction of the excercises defined in the standard. The samples used in the test are subjected to the conditioning required in the standard as temperature conditioning and as received. The face dimensions of the subjects are also reported. The measurement details for each subject and for each excersize are available in the test report.</p> <p>It was reported that;</p> <p>All 50 exercise measurement results are smaller or equal to 11%. According to the results maximum measurement is 2,4 %.</p> <p>All 10 individual's arithmetic mean is smaller or equal to 8%. According to the results the means for 10 subject varies between 0,8 % to 2,0 %.</p> <p style="text-align: center;">According to the reported results, the product meets the limits for FFP1 and FFP2 classification.</p>																							



Article 7.9.2	<p>Penetration of filter material: Sodium Chloride Testing</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Condition</th> <th>No. of Sample</th> <th>Sodium Chloride Testing 95 L/min max (%)</th> <th>Requirements in accordance with EN 149:2001 + A1:2009</th> <th>Result</th> </tr> </thead> <tbody> <tr><td>(A.R.)</td><td>-</td><td>0,1</td><td rowspan="9">FFP1 ≤ 20 % FFP2 ≤ 6 % FFP3 ≤ 1 %</td><td rowspan="9">Filtering half masks fulfill the requirements of the standard EN EN 149:2001 + A1:2009 given in 7.9.2 in range of the first, and second protection classes. FFP1, FFP2, FFP3</td></tr> <tr><td>(A.R.)</td><td>-</td><td>0,2</td></tr> <tr><td>(A.R.)</td><td>-</td><td>0,1</td></tr> <tr><td>(S.W.)</td><td>-</td><td>0,2</td></tr> <tr><td>(S.W.)</td><td>-</td><td>0,1</td></tr> <tr><td>(S.W.)</td><td>-</td><td>0,2</td></tr> <tr><td>(M.S. T.C.)</td><td>-</td><td>0,6</td></tr> <tr><td>(M.S. T.C.)</td><td>-</td><td>0,5</td></tr> <tr><td>(M.S. T.C.)</td><td>-</td><td>0,6</td></tr> </tbody> </table> <p>Conditioning : (M.S.) Mechanical Strength (T.C.) Temperature Conditioning (A.R.) As Received, original (S.W.) Simulated wearing treatment</p> <p style="text-align: right;">95 L/min = 1,6 dm³.sn⁻¹</p>	Condition	No. of Sample	Sodium Chloride Testing 95 L/min max (%)	Requirements in accordance with EN 149:2001 + A1:2009	Result	(A.R.)	-	0,1	FFP1 ≤ 20 % FFP2 ≤ 6 % FFP3 ≤ 1 %	Filtering half masks fulfill the requirements of the standard EN EN 149:2001 + A1:2009 given in 7.9.2 in range of the first, and second protection classes. FFP1, FFP2, FFP3	(A.R.)	-	0,2	(A.R.)	-	0,1	(S.W.)	-	0,2	(S.W.)	-	0,1	(S.W.)	-	0,2	(M.S. T.C.)	-	0,6	(M.S. T.C.)	-	0,5	(M.S. T.C.)	-	0,6
Condition	No. of Sample	Sodium Chloride Testing 95 L/min max (%)	Requirements in accordance with EN 149:2001 + A1:2009	Result																															
(A.R.)	-	0,1	FFP1 ≤ 20 % FFP2 ≤ 6 % FFP3 ≤ 1 %	Filtering half masks fulfill the requirements of the standard EN EN 149:2001 + A1:2009 given in 7.9.2 in range of the first, and second protection classes. FFP1, FFP2, FFP3																															
(A.R.)	-	0,2																																	
(A.R.)	-	0,1																																	
(S.W.)	-	0,2																																	
(S.W.)	-	0,1																																	
(S.W.)	-	0,2																																	
(M.S. T.C.)	-	0,6																																	
(M.S. T.C.)	-	0,5																																	
(M.S. T.C.)	-	0,6																																	
Article 7.9.2	<p>Penetration of filter material : Paraffin Oil Testing</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Condition</th> <th>No. of Sample</th> <th>Paraffin Oil Testing 95 L/min max (%)</th> <th>Requirements in accordance with EN 149:2001 + A1:2009</th> <th>Result</th> </tr> </thead> <tbody> <tr><td>(A.R.)</td><td>-</td><td>0,2</td><td rowspan="9">FFP1 ≤ 20 % FFP2 ≤ 6 % FFP3 ≤ 1 %</td><td rowspan="9">Filtering half masks fulfill the requirements of the standard EN EN 149:2001 + A1:2009 given in 7.9.2 in range of the first and second protection classes. FFP1, FFP2, FFP3</td></tr> <tr><td>(A.R.)</td><td>-</td><td>0,3</td></tr> <tr><td>(A.R.)</td><td>-</td><td>0,2</td></tr> <tr><td>(S.W.)</td><td>-</td><td>0,3</td></tr> <tr><td>(S.W.)</td><td>-</td><td>0,2</td></tr> <tr><td>(S.W.)</td><td>-</td><td>0,3</td></tr> <tr><td>(M.S. T.C.)</td><td>-</td><td>0,7</td></tr> <tr><td>(M.S. T.C.)</td><td>-</td><td>0,6</td></tr> <tr><td>(M.S. T.C.)</td><td>-</td><td>0,8</td></tr> </tbody> </table> <p>Conditioning : (M.S.) Mechanical Strength (T.C.) Temperature Conditioning (A.R.) As Received, original (S.W.) Simulated wearing treatment</p>	Condition	No. of Sample	Paraffin Oil Testing 95 L/min max (%)	Requirements in accordance with EN 149:2001 + A1:2009	Result	(A.R.)	-	0,2	FFP1 ≤ 20 % FFP2 ≤ 6 % FFP3 ≤ 1 %	Filtering half masks fulfill the requirements of the standard EN EN 149:2001 + A1:2009 given in 7.9.2 in range of the first and second protection classes. FFP1, FFP2, FFP3	(A.R.)	-	0,3	(A.R.)	-	0,2	(S.W.)	-	0,3	(S.W.)	-	0,2	(S.W.)	-	0,3	(M.S. T.C.)	-	0,7	(M.S. T.C.)	-	0,6	(M.S. T.C.)	-	0,8
Condition	No. of Sample	Paraffin Oil Testing 95 L/min max (%)	Requirements in accordance with EN 149:2001 + A1:2009	Result																															
(A.R.)	-	0,2	FFP1 ≤ 20 % FFP2 ≤ 6 % FFP3 ≤ 1 %	Filtering half masks fulfill the requirements of the standard EN EN 149:2001 + A1:2009 given in 7.9.2 in range of the first and second protection classes. FFP1, FFP2, FFP3																															
(A.R.)	-	0,3																																	
(A.R.)	-	0,2																																	
(S.W.)	-	0,3																																	
(S.W.)	-	0,2																																	
(S.W.)	-	0,3																																	
(M.S. T.C.)	-	0,7																																	
(M.S. T.C.)	-	0,6																																	
(M.S. T.C.)	-	0,8																																	
Article 7.10	<p>Compatibility with skin: In Practical Performance report, the likelihood of mask materials in contact with the skin causing irritation or other adverse effect on health was not reported.</p>																																		
Article 7.11	<p>Flammability :</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Condition</th> <th>No. of Sample</th> <th>Visual inspection</th> <th>Requirements in accordance with EN 149:2001 + A1:2009</th> <th>Result</th> </tr> </thead> <tbody> <tr><td>(A.R.)</td><td>-</td><td>0,4s</td><td rowspan="5">Filtering half mask shall not burn or not continue to burn for more than 5 s after removal from the flame</td><td rowspan="5">Passed Filtering half masks fulfill requirements of the standard</td></tr> <tr><td>(A.R.)</td><td>-</td><td>0,4s</td></tr> <tr><td>(T.C.)</td><td>-</td><td>0,5s</td></tr> <tr><td>(T.C.)</td><td>-</td><td>0,4s</td></tr> <tr><td>(T.C.)</td><td>-</td><td>0,4s</td></tr> </tbody> </table> <p>Conditioning : (A.R.) As Received, original (T.C.) Temperature Conditioning</p>	Condition	No. of Sample	Visual inspection	Requirements in accordance with EN 149:2001 + A1:2009	Result	(A.R.)	-	0,4s	Filtering half mask shall not burn or not continue to burn for more than 5 s after removal from the flame	Passed Filtering half masks fulfill requirements of the standard	(A.R.)	-	0,4s	(T.C.)	-	0,5s	(T.C.)	-	0,4s	(T.C.)	-	0,4s												
Condition	No. of Sample	Visual inspection	Requirements in accordance with EN 149:2001 + A1:2009	Result																															
(A.R.)	-	0,4s	Filtering half mask shall not burn or not continue to burn for more than 5 s after removal from the flame	Passed Filtering half masks fulfill requirements of the standard																															
(A.R.)	-	0,4s																																	
(T.C.)	-	0,5s																																	
(T.C.)	-	0,4s																																	
(T.C.)	-	0,4s																																	
Article 7.12	<p>Carbon dioxide content of the inhalation air:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Condition</th> <th>No. of Sample</th> <th>CO₂ content of the inhalation air [%] by volume</th> <th>An average CO₂ content of the inhalation air</th> <th>Requirements in accordance with EN 149:2001 + A1:2009</th> <th>Result</th> </tr> </thead> <tbody> <tr><td>(A.R.)</td><td>-</td><td>0,6827</td><td rowspan="3">0,68</td><td rowspan="3">CO₂ content of the inhalation air shall not exceed an average of 1,0% by volume</td><td rowspan="3">Passed Filtering half masks fulfill requirements of the standard</td></tr> <tr><td>(A.R.)</td><td>-</td><td>0,6813</td></tr> <tr><td>(A.R.)</td><td>-</td><td>0,6810</td></tr> </tbody> </table> <p>Conditioning : (A.R.) As Received, original</p>	Condition	No. of Sample	CO ₂ content of the inhalation air [%] by volume	An average CO ₂ content of the inhalation air	Requirements in accordance with EN 149:2001 + A1:2009	Result	(A.R.)	-	0,6827	0,68	CO ₂ content of the inhalation air shall not exceed an average of 1,0% by volume	Passed Filtering half masks fulfill requirements of the standard	(A.R.)	-	0,6813	(A.R.)	-	0,6810																
Condition	No. of Sample	CO ₂ content of the inhalation air [%] by volume	An average CO ₂ content of the inhalation air	Requirements in accordance with EN 149:2001 + A1:2009	Result																														
(A.R.)	-	0,6827	0,68	CO ₂ content of the inhalation air shall not exceed an average of 1,0% by volume	Passed Filtering half masks fulfill requirements of the standard																														
(A.R.)	-	0,6813																																	
(A.R.)	-	0,6810																																	
Article 7.13	<p>Head harness: In Practical Performance and TIL test reports no adverse effects have been reported for donning and remove of the mask also the results of these tests indicates that the head harnesses are capable of holding the mask firmly enough.</p>																																		
Article 7.14	<p>Field of vision: In Practical Performance report, no adverse effects were reported for the field of vision availability when the mask is worn.</p>																																		
Article 7.16	<p>Breathing Resistance: Inhalation</p> <p>The overall evaluation in the figures gathered for 9 different samples 3 as received, 3 with temperature conditioning and 3 Simulated wearing conditioned, complies with the limits given in the standard for FFP1, FFP2 and FFP3 classes. This is valid for inhalation results for 30 L/min, 95 L/min and exhalation at 160 L/min.</p> <p>Passed.</p>																																		



Article 7.17.2	Clogging: This test is not applied to Particle Filtering Half Mask which is not reusable. <i>(For single shift use devices, the clogging test is optional test. For re-usable devices test is mandatory.)</i>
Article 7.17.3	Penetration of filter material: This test is not applied to Particle Filtering Half Mask which is not reusable.
Article 7.18	Demountable Parts: There are no demountable parts on the product.
Article 9	Marking – Packaging: Necessary markings are available on the product package (box). The name and trademark of the manufacturer is stated to exist on the carton boxes. The type of the mask and the classification including the status of re-usability, the reference to EN 149:2001+A1:2009 standard, the year of end of shelf life, using and storage instructions and pictograms and CE mark are available on the product package. The above evaluation is based on the technical document for packaging and marking, for box design. Verified on the annex 9.1 and annex 6 of the technical file. The technical documentation for mask design (drawing) also evaluated for marking requirements, drawing Annex 6. The mask template (drawing) indicates that the mask will carry information about the brandname of the manufacturer, type of mask, the reference to EN 149+A1:2009 standard and classification including the re-usability of the mask. The manufacturer also printed CE mark with our Notified Body number. The mask do not have sub-assemblies. Even the tested samples by the laboratory do not carry necessary marking information as stated in the technical documentation, the manufacturer shall follow marking instructions for serial production. CRD-F-001 drawing which exists in the technical file of the manufacturer, Annex 6 of technical file.
Article 10	Information to be supplied by the manufacturer: In each of the smallest commercially available packaging of the product, implementation (installation instructions) pre-use controls, warning and usage limitations, storage and meanings of symbols / pictograms are defined. User instruction document in the technical file found to be appropriate, Annex 8. The manufacturer shall include this documented user information text in every smallest commercially available package.

PREPARED BY	APPROVED BY
Osman CAMCI PPE Expert 	Suat KAÇMAZ Director  